arXiv:1302.5973v1 [cs.IT] 25 Feb 2013

Sample Approximation-Based Deflation Approaches for Chance SINR Constrained Joint Power and Admission Control

Ya-Feng Liu and Enbin Song

Abstract

Joint power and admission control (JPAC) aims at supporting a maximum number of links at their specified signal to interference plus noise ratio (SINR) targets while using a minimum total transmission power in the interference-limited network. Almost all of the existing works on JPAC assume perfect channel state information (CSI). However, this kind of assumption generally does not hold true. In this work, we consider the chance (probabilistic) SINR constrained JPAC problem, where a random channel model is used and each link's SINR outage probability is enforced to be not greater than a specified tolerance. The chance SINR constraints are computationally intractable in general even though the channel distribution information (CDI) is assumed. To circumvent the extreme difficulty of chance SINR constraints, we use sample (scenario) approximation scheme to simplify them. The sample approximation scheme not only transforms the difficult chance SINR constraints into finitely many (depending on the sample size) simple linear constraints, but also relaxes the assumption of CDI, thus being distributionally robust.

Furthermore, we reformulate the sample approximation of the chance SINR constrained JPAC problem as a group sparse minimization problem and then relax it to a second-order cone program (SOCP). The solution of the SOCP relaxation problem can be used to check the simultaneous supportability of all links in the network and to guide an iterative link removal procedure (deflation). Instead of solving

---

Part of this work was submitted to the 14th IEEE International Workshop on Signal Processing Advances in Wireless Communications (SPAWC), Darmstadt, Germany, June 16–19, 2013 [12].

Y.-F. Liu (corresponding author) is with the State Key Laboratory of Scientific and Engineering Computing, Institute of Computational Mathematics and Scientific/Engineering Computing, Academy of Mathematics and Systems Science, Chinese Academy of Sciences, Beijing, 100190, China (e-mail: yafliu@lsec.cc.ac.cn).

E. Song is with the Department of Mathematics, Sichuan University, Chengdu, 610064, China (e-mail: e.b.song@163.com).

the SOCP with general-purpose solvers like CVX, we exploit its special structure and custom-design an efficient algorithm. We illustrate the effectiveness and efficiency of the proposed sample approximation-based deflation approaches by using a nonrobust counterpart as the benchmark.

Index Terms

Chance SINR constraint, distributionally robust, group sparse, power and admission control, sample approximation.

I. INTRODUCTION

Joint power and admission control (JPAC) has been recognized as an effective tool for interference management in cellular, ad hoc, and cognitive underlay wireless networks for two decades [1]–[19]. The goal of JPAC is to support a maximum number of links at their specified signal to interference plus noise ratio (SINR) targets while using a minimum total transmission power when all links in the interference-limited network can not be simultaneously supported. JPAC can not only determine which interfering links must be turned off and rescheduled along orthogonal resource dimensions (such as time, space, or frequency slots), but also alleviate the difficulties of the convergence of stand-alone power control algorithms. For example, a long-standing issue associated with the Foschini-Miljanic algorithm [3] is that, it does not converge when the preselected SINR levels are infeasible. In this case, a JPAC approach must be adopted to determine which links to be removed.

The JPAC problem can be solved to global optimality by checking the simultaneous supportability of every subset of links. However, the computational complexity of this enumeration approach grows exponentially with the total number of links. Theoretically, the problem is known to be NP-hard to solve (to global optimality) and to approximate (to constant ratio global optimality) [1], [4], [10], so various heuristics algorithms [1]–[19] have been proposed. In particular, the reference [1] proposed a convex approximation-based algorithm, called linear programming deflation (LPD) algorithm. Instead of solving the original NP-hard problem directly, the LPD algorithm solves an appropriate LP approximation of the original problem at each iteration and use its solution to guide the removal of interfering links. The removal procedure is terminated until all the remaining links in the network are simultaneously supportable. The reference [10] developed another LP relaxation-based new linear programming deflation (NLPD) algorithm for the JPAC problem. In [10], the JPAC problem is first equivalently reformulated as a sparse ℓ_0-minimization problem and then its ℓ_1-convex relaxation is used to derive a LP, which is different from the one in [1]. Again, the solution to the derived LP can guide an iterative link removal procedure, and the removal procedure is terminated if all the remaining links in the network are simultaneously supportable. Similar ideas were also used in [13], [19] to solve the joint beamforming and admission control problem for the cellular downlink network.

The joint power/beamforming and admission control problem in the above-mentioned references except [1] assumes perfect channel state information (CSI). However, such an assumption generally does not hold in practice [20]. In [1], the authors considered the worst-case robust JPAC problem with bounded channel estimation errors. The key in [1] is that the relaxed LP with bounded uncertainty can be equivalently rewritten as a second-order cone program (SOCP). The overall approximation algorithm remains similar to LPD for the case of perfect CSI, except that the SOCP formulation is used to carry out power control and its solution is used to check whether links are simultaneously supportable in the worst case.

In this paper, we consider the chance (probabilistic or outage-based) SINR constrained JPAC problem, where a random channel model is used and each link's SINR outage probability must be kept below a given tolerance. Unfortunately, this kind of optimization problems turn out to be extremely difficult to solve in an *exact* fashion, since chance SINR constraints are computationally intractable even though channel distribution information (CDI) is assumed. Thanks to recent advances in chance constrained optimization [21], [22], the chance SINR constraint can be approximated via sampling with provable performance guarantee. The sample (scenario) approximation typically does not require explicit CDI. Instead, it only requires that the random channel parameters can be sampled. Therefore, the sample approximation technique is distributionally robust. As remarked in [23], most wireless systems are constantly sampling channel fading processes as part of the operation for coherent detection and adaptive modulation. Hence, the above sampling requirement can be easily satisfied.

We further show that the sample approximation of the chance SINR constrained JPAC problem can be equivalently reformulated as a group sparse ℓ_0-minimization problem, which is a nontrivial extension of the sparse formulation in [10]. Then, we consider its ℓ_1-relaxation, which is an SOCP (different from the one in [1]), and use the solution of the SOCP relaxation problem to check the simultaneous supportability of all links in the network and guide an iterative link removal procedure (deflation). Instead of relying on standard SOCP solvers to solve the derived SOCP, we exploit its special structure and custom-design an efficient algorithm. Moreover, we develop an easily checkable necessary condition for all links in the network to be simultaneously supported at their desired SINR requirements. This condition allows us to iteratively remove strong interfering links and therefore significantly accelerate the deflation process. Numerical results show that the proposed sample approximation-based deflation approaches perform very well.

Notations: Denote the index set $\{1, 2, \cdots, K\}$ by $\mathcal{K}$. Lowercase boldface and uppercase boldface are used for vectors and matrices, respectively. For a given vector $\mathbf{x}$, the notations $\max\{\mathbf{x}\}$, $\min\{\mathbf{x}\}$, $(\mathbf{x})_k$, and $\|\mathbf{x}\|_0$ stand for its maximum entry, its minimum entry, its k-th entry, and the indicator function of $\mathbf{x}$ (i.e., $\|\mathbf{x}\|_0 = 0$ if $\mathbf{x} = \mathbf{0}$ and $\|\mathbf{x}\|_0 = 1$ otherwise), respectively. The expression $\mathbf{x}_1 \circ \mathbf{x}_2$ represents the Hadamard product and $\max\{\mathbf{x}_1, \mathbf{x}_2\}$ $(\min\{\mathbf{x}_1, \mathbf{x}_2\})$ the component-wise maximum (minimum) of two vectors $\mathbf{x}_1$ and $\mathbf{x}_2$. For any subset $\mathcal{I} \subseteq \mathcal{K}$, $\mathbf{A}_{\mathcal{I}}$ stands for the matrix formed by the rows of $\mathbf{A}$ indexed by $\mathcal{I}$. The spectral radius of a matrix $\mathbf{A}$ is denoted by $\rho(\mathbf{A})$. We use $(\mathbf{A}_1, \mathbf{A}_2)$ to denote the matrix formed by stacking matrices $\mathbf{A}_1$ and $\mathbf{A}_2$ by column and use $(\mathbf{A}_1; \mathbf{A}_2)$ to denote the matrix formed by stacking $\mathbf{A}_1$ and $\mathbf{A}_2$ by row. Similar notations apply to stacking of vectors and scalars. Finally, we use $\mathbf{e}$ to represent the vector of an appropriate size with all components being one, $\mathbf{I}$ the identity matrix of an appropriate size, and $\mathbf{E}_k$ the matrix of an appropriate size with all entries being zero except its k-th column entries being one, respectively.

II. REVIEW OF THE NLPD ALGORITHM

The algorithms developed for the chance SINR constrained JPAC problem in this work are based on the NLPD algorithm [10] for the JPAC problem that assumes perfect CSI. To streamline the presentation, we briefly review the NLPD algorithm in this section. The basic idea of the NLPD algorithm is to update the power and check whether all links can be supported or not. If the answer is yes, then terminate the algorithm; else drop one link from the network and update the power again. The above process is repeated until all the remaining links can be simultaneously supported.

Specifically, consider a K-link (a link corresponds to a transmitter-receiver pair) interference channel with channel gains $g_{k,j} \geq 0$ (from transmitter j to receiver k), noise power $\eta_k > 0$, SINR target $\gamma_k > 0$, and power budget $\bar{p}_k > 0$ for $k, j \in \mathcal{K}$. Denote the power allocation vector by $\mathbf{p} = (p_1, p_2, \cdots, p_K)^T$ and the power budget vector by $\bar{\mathbf{p}} = (\bar{p}_1, \bar{p}_2, \cdots, \bar{p}_K)^T$. Treating interference as noise, we can write the SINR at the k-th receiver as

$$\text{SINR}_k(\mathbf{p}) = \frac{g_{k,k}p_k}{\eta_k + \sum\limits_{j \neq k} g_{k,j}p_j}, \quad \forall\, k \in \mathcal{K}. \tag{1}$$

Correspondingly, we introduce an equivalent normalized channel. In particular, we use

$$\mathbf{q} = (q_1, q_2, \cdots, q_K)^T \tag{2}$$

with $q_k = p_k/\bar{p}_k$ to denote the normalized power allocation vector, and use $\mathbf{c} = (c_1, c_2, \cdots, c_K)^T$ with $c_k = (\gamma_k \eta_k)/(g_{k,k}\bar{p}_k) > 0$ to denote the normalized noise vector. We denote the normalized channel matrix by $\mathbf{A} \in \mathbb{R}^{K \times K}$ with the (k, j)-th entry

$$a_{k,j} = \begin{cases} 1, & \text{if } k = j; \\ -\dfrac{\gamma_k g_{k,j}\bar{p}_j}{g_{k,k}\bar{p}_k}, & \text{if } k \neq j. \end{cases}$$

With these notations, it is simple to check that

$$\text{SINR}_k(\mathbf{p}) \geq \gamma_k \Leftrightarrow (\mathbf{A}\mathbf{q} - \mathbf{c})_k \geq 0.$$

Based on the Balancing Lemma [24], we reformulate the joint power and admission control problem as a sparse optimization problem

$$\begin{array}{ll} \min\limits_{\mathbf{q}} & \sum_{k \in \mathcal{K}} \|(\mathbf{c} - \mathbf{A}\mathbf{q})_k\|_0 + \alpha \bar{\mathbf{p}}^T \mathbf{q} \\ \text{s.t.} & \mathbf{0} \leq \mathbf{q} \leq \mathbf{e}, \end{array} \tag{3}$$

where $0 < \alpha < \alpha_1 := 1/\mathbf{e}^T\bar{\mathbf{p}}$. In the above, $\mathbf{e}$ is the all-one vector of length K. Since problem (3) is NP-hard, we further consider its ℓ_1-convex relaxation (which is equivalent to an LP)

$$\begin{array}{ll} \min\limits_{\mathbf{q}} & \|\mathbf{c} - \mathbf{A}\mathbf{q}\|_1 + \alpha \bar{\mathbf{p}}^T \mathbf{q} \\ \text{s.t.} & \mathbf{0} \leq \mathbf{q} \leq \mathbf{e}. \end{array} \tag{4}$$

By solving (4), we know whether all links in the network can be simultaneously supported or not. If not, we drop one link (mathematically, delete the corresponding row and column of $\mathbf{A}$ and the corresponding entry of $\bar{\mathbf{p}}$ and $\mathbf{c}$) from the network according to some removal strategy, and solve a reduced problem (4) until all the remaining links are supported.

III. PROBLEM FORMULATION

Consider the chance SINR constrained JPAC problem, where the channel gains $\{g_{k,j}\}$ and the noise power $\{\eta_k\}$ in the SINR expression (1) are now random variables[1]. Since $\{g_{k,j}\}$ and $\{\eta_k\}$ in (1) are random variables, we need to redefine the concept that a link is supported. We call link k is supported if its outage probability is below a specified tolerance $\epsilon \in (0,1)$, i.e.,

$$\mathbb{P}\left(\text{SINR}_k(\mathbf{p}) \geq \gamma_k\right) \geq 1-\epsilon, \tag{5}$$

where the probability is taken with respect to the random variables $\{g_{k,j}\}$ and $\{\eta_k\}$.

The chance SINR constrained JPAC problem can be formulated as a two-stage optimization problem. Specifically, the first stage maximizes the number of admitted links:

$$\begin{aligned} \max_{\mathbf{p},\,\mathcal{S}} \quad & |\mathcal{S}| \\ \text{s.t.} \quad & \mathbb{P}\left(\text{SINR}_k(\mathbf{p}) \geq \gamma_k\right) \geq 1-\epsilon,~ k \in \mathcal{S} \subseteq \mathcal{K}, \\ & \mathbf{0} \leq \mathbf{p} \leq \bar{\mathbf{p}}. \end{aligned} \tag{6}$$

We use $\mathcal{S}_0$ to denote the optimal solution for problem (6) and call it *maximum admissible set*. Notice that the solution for (6) might not be unique. The second stage minimizes the total transmission power required to support the admitted links:

$$\begin{aligned} \min_{\{p_k\}_{k\in\mathcal{S}_0}} \quad & \textstyle\sum_{k\in\mathcal{S}_0} p_k \\ \text{s.t.} \quad & \mathbb{P}\left(\text{SINR}_k(\mathbf{p}) \geq \gamma_k\right) \geq 1-\epsilon,~ k \in \mathcal{S}_0, \\ & 0 \leq p_k \leq \bar{p}_k,~ k \in \mathcal{S}_0. \end{aligned} \tag{7}$$

Due to the choice of $\mathcal{S}_0$, power control problem (7) is feasible.

IV. SAMPLE APPROXIMATION AND REFORMULATION

In general, the chance SINR constrained optimization problem (6) and problem (7) are difficult to solve exactly, since it is difficult to obtain the closed-form expression of (5) (even though CDI is known). In this section, we first approximate the computationally intractable chance SINR constraints via sampling, and then reformulate the sample approximation of problems (6) and (7) as a group sparse optimization problem. Three distinctive advantages of the sample approximation scheme are as follows. First, it does not require explicit CDI, but only needs samples of channel realizations, which are already available as part of the operation of current wireless systems. Second, the sample approximation technique significantly simplifies problems (6) and (7) by replacing the difficult chance SINR constraint with finitely many simple linear constraints. Last but not the least, solving the sample approximation problem returns a solution to the original chance constrained problem with guaranteed performance [21], [22].

---

[1] Here we do not assume their distribution.

A. Sample Approximation

We handle the chance SINR constraint via sample approximations [21], [25]. Suppose $\left\{g_{k,j}^n, \eta_k^n\right\}_{n=1}^N$ are N independent samples drawn according to the distribution of $\{g_{k,j}, \eta_k\}$, we use

$$\text{SINR}_k^n(\mathbf{p}) := \frac{g_{k,k}^n p_k}{\eta_k^n + \sum\limits_{j \neq k} g_{k,j}^n p_j} \geq \gamma_k,\ n \in \mathcal{N} := \{1, 2, \cdots, N\} \tag{8}$$

to approximate the chance SINR constraint (5). Intuitively, if the sample size N is sufficiently large, then the power allocation vector $\mathbf{p}$ satisfying (8) will satisfy the chance SINR constraint (5) with high probability. As shown in [22], [23], we have the following Theorem.

Theorem 4.1: If

$$N \geq N^* := \left\lceil \frac{1}{\epsilon}\left(K - 1 + \ln\frac{1}{\delta} + \sqrt{2(K-1)\ln\frac{1}{\delta} + \ln^2\frac{1}{\delta}}\right)\right\rceil \tag{9}$$

for any $\delta \in (0, 1)$, then the solution to problem

$$\begin{aligned} \min_{\mathbf{p}} \quad & \mathbf{e}^T\mathbf{p} \\ \text{s.t.} \quad & \text{SINR}_k^n(\mathbf{p}) \geq \gamma_k,\ k \in \mathcal{K},\ n \in \mathcal{N}, \\ & \mathbf{0} \leq \mathbf{p} \leq \bar{\mathbf{p}}, \end{aligned} \tag{10}$$

will satisfy each of the chance SINR constraint (5) with probability at least $(1 - \delta)$.

Theorem 4.1 shows that it makes sense to call link k is supported if *all sampled SINR constraints* in (8) are satisfied. In fact, the above sample approximation technique admits the following explanation. Assume that the channel gains $\{g_{k,j}\}$ and the noise power $\{\eta_k\}$ are random variables (but their distribution is unknown). We observe the channel and noise realizations of all links at time slots $1, 2, \cdots, N$, and design a power allocation strategy (i.e., support some links with appropriate power allocation and remove the others) based on the observed channel and noise realizations at these time slots. Then this observe-and-design power allocation strategy can be used at the following time slots, and it is capable of satisfying the supported links' chance

SINR requirements with high probability if the number of observed time slots is large. The equation (9) reveals how the probability parameter δ and the number of observed time slots N are related to each other.

We remark that if problem (10) is feasible, it has the following property.

Lemma 4.1 (Balancing Lemma): Suppose $\mathbf{p}$ is the solution to problem (10). Then for each $k \in \mathcal{K}$, these must exist an index $1 \leq n_k \leq N$ such that $\text{SINR}_k^{n_k}(\mathbf{p}) = \gamma_k$.

It is easy to show Lemma 4.1 by contradiction. Assume that there exists an index $k \in \mathcal{K}$ such that $\text{SINR}_k^{n}(\mathbf{p}) > \gamma_k$ for all $n \in \mathcal{N}$. Then we can appropriately decrease p_k and strictly decrease the objective function of problem (10) without violating the other links' sampled SINR constraints. The Balancing Lemma induces the following distributed Algorithm 1 to solve the sampled power control problem (10), which is an extension of the Foschini-Miljanic algorithm [3]. In fact, when $N = 1$, Algorithm 1 reduces to the Foschini-Miljanic algorithm. The convergence of Algorithm 1 can be similarly shown as in [3].

```
Algorithm 1: A Distributed Algorithm for Problem (10)
Step 1. Initialization: Given a tolerance $\epsilon > 0$ and a feasible point
        $\mathbf{p}(0) = (p_1(0), p_2(0), \cdots, p_K(0))^T$, and set $t = 0$.
Step 2. Iteration: Update the power allocation vector by
        $p_k(t+1) = \min\left\{ \frac{\gamma_k}{\min_{n \in \mathcal{N}} \{\text{SINR}_k^n(\mathbf{p}(t))\}} p_k(t), \bar{p}_k \right\}, \ k \in \mathcal{K}.$
Step 3. Termination: If $\|\mathbf{p}(t+1) - \mathbf{p}(t)\| \leq \epsilon$, then stop; else set $t = t+1$,
        and go to Step 2.
```

B. Sampled Channel Normalization

To facilitate the reformulation of the sample approximation of problems (6) and (7) and the development of efficient algorithms, we normalize the sampled channel parameters. To this aim, we use

$$\mathbf{c}_k = \left(\frac{\gamma_k \eta_k^1}{g_{k,k}^1 \bar{p}_k}, \frac{\gamma_k \eta_k^2}{g_{k,k}^2 \bar{p}_k}, \cdots, \frac{\gamma_k \eta_k^N}{g_{k,k}^N \bar{p}_k} \right)^T \in \mathbb{R}^{N \times 1}$$

to denote the normalized noise vector of link k. Define

$$a_{k,j}^n = \begin{cases} 1, & \text{if } k = j; \\ -\dfrac{\gamma_k g_{k,j}^n \bar{p}_j}{g_{k,k}^n \bar{p}_k}, & \text{if } k \neq j, \end{cases}$$

$$\boldsymbol{a}_k^n = \left(a_{k,1}^n, a_{k,2}^n, \cdots, a_{k,K}^n\right) \in \mathbb{R}^{1\times K},\ n \in \mathcal{N},\ k \in \mathcal{K},$$

and

$$\mathbf{A}_k = \left(\boldsymbol{a}_k^1; \boldsymbol{a}_k^2; \cdots; \boldsymbol{a}_k^N\right) \in \mathbb{R}^{N\times K},\ k \in \mathcal{K}.$$

Notice that the entries of the k-th column of $\mathbf{A}_k$ are one, and all the other entries are nonpositive. This special structure of $\mathbf{A}_k$ $(k \in \mathcal{K})$ will play an important role in the reformulation of the sample approximation problem. Furthermore, we let

$$\mathbf{c} = (\mathbf{c}_1; \mathbf{c}_2; \cdots; \mathbf{c}_K) \in \mathbb{R}^{NK\times 1}$$

and

$$\mathbf{A} = (\mathbf{A}_1; \mathbf{A}_2; \cdots; \mathbf{A}_K) \in \mathbb{R}^{NK\times K}.$$

With the above notations, we can see that

$$\text{SINR}_k^n(\mathbf{p}) \geq \gamma_k,\ \forall\ n \in \mathcal{N} \Leftrightarrow \mathbf{A}_k\mathbf{q} \geq \mathbf{c}_k.$$

Consequently, problem (6) can be equivalently rewritten as

$$\begin{aligned} \max_{\mathbf{q},\,\mathcal{S}} \quad & |\mathcal{S}| \\ \text{s.t.} \quad & \mathbf{A}_k\mathbf{q} - \mathbf{c}_k \geq 0,\ k \in \mathcal{S} \subseteq \mathcal{K}, \\ & \mathbf{0} \leq \mathbf{q} \leq \mathbf{e}, \end{aligned} \tag{11}$$

and problem (7) can be restated as

$$\begin{aligned} \min_{\{q_k\}_{k\in\mathcal{S}_0}} \quad & \sum_{k\in\mathcal{S}_0} \bar{p}_k q_k \\ \text{s.t.} \quad & \mathbf{A}_k\mathbf{q} - \mathbf{c}_k \geq 0,\ k \in \mathcal{S}_0, \\ & 0 \leq q_k \leq 1,\ k \in \mathcal{S}_0, \end{aligned} \tag{12}$$

where $\mathcal{S}_0$ is the solution of the sampled admission control problem (11). It is easy to see that the sampled power control problem (12) is feasible and thus can be efficiently solved by Algorithm 1.

C. Group Sparse Minimization Reformulation

It turns out that the two-stage sampled joint power and admission control problem (11) and (12) can be reformulated as a single-stage group sparse optimization problem

$$\begin{aligned} \min_{\mathbf{q}} \quad & \textstyle\sum_k \|\max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\}\|_0 + \alpha\bar{\mathbf{p}}^T\mathbf{q} \\ \text{s.t.} \quad & \mathbf{0} \leq \mathbf{q} \leq \mathbf{e}, \end{aligned} \tag{13}$$

where

$$0 < \alpha < \alpha_1 := 1/\mathbf{e}^T\bar{\mathbf{p}}. \tag{14}$$

Actually, if there are more than one maximum admissible set (i.e., the solution for problem (11) may not be unique), the formulation (13) is capable of picking the one with *minimum* total transmission power as a result of the second term in the objective of (13). We conclude the above results in Theorem 4.2 and relegate its proof to Appendix A.

Theorem 4.2: Suppose $\mathbf{q}^*$ is the solution to problem (13). Then the optimal value of problem (13) lies in $(M, M+1)$ if and only if the optimal value of problem (11) is equal to M (i.e., there exists $\mathcal{M} \subset \mathcal{K}$ with $|\mathcal{M}| = M$ such that $\mathbf{A}_k\mathbf{q}^* \geq \mathbf{c}_k$ for all $k \in \mathcal{M}$). In fact, the set of links indexed by $\{\ k \in \mathcal{K} \mid \mathbf{A}_k\mathbf{q}^* \geq \mathbf{c}_k\ \}$ (whose cardinality is M) is simultaneously supportable by the power allocation $\mathbf{p}^* = \bar{\mathbf{p}} \circ \mathbf{q}^*$. Moreover, $\bar{\mathbf{p}}^T\mathbf{q}^*$ is the minimum total transmission power required to support any M links in the network.

The formulation (13) also has the following property stated in Proposition 4.1, which is mainly due to the special structure of $\mathbf{A}_k$. The proof of Proposition 4.1 can be found in Appendix B.

Proposition 4.1: Suppose that $\mathbf{q}^*$ is the solution to problem (13) and link k is supported at the point $\mathbf{q}^*$ (i.e., $\mathbf{c}_k - \mathbf{A}_k\mathbf{q}^* \leq \mathbf{0}$). Then there must exist an index $1 \leq n_k \leq N$ such that $(\mathbf{c}_k - \mathbf{A}_k\mathbf{q}^*)_{n_k} = 0$.

Proposition 4.1 implies that problem (13) can be viewed as an (nontrivial) extension of problem (3). In fact, we know from Proposition 4.1 that when $N = 1$, the solution of problem (13) satisfies $\mathbf{c} - \mathbf{A}\mathbf{q}^* \geq \mathbf{0}$ (i.e., $(\mathbf{c} - \mathbf{A}\mathbf{q}^*)_k = 0$ for supported links and $(\mathbf{c} - \mathbf{A}\mathbf{q}^*)_k > 0$ for unsupported links), and problem (13) reduces to problem (3). Since problem (3) is strongly NP-hard to solve to global optimality and strongly NP-hard to approximate to constant factor global optimality [1], [4], [10], it follows that problem (13) is also strongly NP-hard to solve and approximate.

A main difference between problem (13) and problem (3) is as follows. In problem (3), if link k is supported, then $\mathbf{c}_k - \mathbf{A}_k\mathbf{q}^*$ in this case is a scalar and equals zero; while in problem (13), if link k is supported, $\mathbf{c}_k - \mathbf{A}_k\mathbf{q}^*$ is not necessarily equal to zero. This is the reason why we do not just put $\mathbf{c}_k - \mathbf{A}_k\mathbf{q}$ in the objective of (13) but put $\max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\}$ there. To illustrate this, we give the following example, where $K = N = 2$, and

$$\mathbf{A} = (\mathbf{A}_1; \mathbf{A}_2) = \begin{pmatrix} 1 & -0.2 \\ 1 & -0.5 \\ -0.3 & 1 \\ -0.5 & 1 \end{pmatrix}, \ \mathbf{c} = \begin{pmatrix} 0.5 \\ 0.5 \\ 0.5 \\ 0.5 \end{pmatrix}.$$

It is simple to check that the only possible way to simultaneously support the two links $\{1, 2\}$ is setting $\mathbf{q} = \mathbf{e}$. However,

$$\mathbf{A}_1\mathbf{e} - \mathbf{c}_1 = \begin{pmatrix} 0.3 \\ 0 \end{pmatrix} \text{ and } \mathbf{A}_2\mathbf{e} - \mathbf{c}_2 = \begin{pmatrix} 0.2 \\ 0 \end{pmatrix}.$$

V. EFFICIENT DEFLATION APPROACHES FOR THE SAMPLED JPAC PROBLEM

In this section, we develop efficient convex approximation-based deflation algorithms to solve the sampled JPAC problem (13). As we see, problem (13) has a discontinuous objective function due to the first term. However, it allows for an efficient convex relaxation. We first relax problem (13) to a convex problem, which is actually equivalent to an SOCP, and then design efficient algorithms for solving the relaxation problem. The solution to the relaxation problem can be used to check the simultaneous supportability of all links in the network and guide an iterative link removal procedure (deflation). We conclude this section with two convex approximation-based deflation algorithms for solving the sampled joint control problem (13).

A. Convex Relaxation

Since problem (13) is strongly NP-hard, we consider its convex relaxation problem

$$\begin{aligned} \min_{\mathbf{q}} \quad & \textstyle\sum_k \left\|\max\left\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\right\}\right\|_2 + \alpha\bar{\mathbf{p}}^T\mathbf{q} \\ \text{s.t.} \quad & \mathbf{0} \leq \mathbf{q} \leq \mathbf{e}. \end{aligned} \tag{15}$$

To show the convexity of problem (15), it suffices to show that $\left\|\max\left\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\right\}\right\|_2$ is convex with respect to $\mathbf{q}$. In fact, for any $\mathbf{q}_1, \mathbf{q}_2$, and $\lambda \in (0, 1)$, we have

$$\begin{aligned} & \left\|\max\left\{\mathbf{c}_k - \mathbf{A}_k\left(\lambda\mathbf{q}_1 + (1-\lambda)\mathbf{q}_2\right), \mathbf{0}\right\}\right\|_2 \\ = \ & \left\|\max\left\{\lambda(\mathbf{c}_k - \mathbf{A}_k\mathbf{q}_1) + (1-\lambda)\left(\mathbf{c}_k - \mathbf{A}_k\mathbf{q}_2\right), \mathbf{0}\right\}\right\|_2 \\ \leq \ & \left\|\lambda\max\left\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}_1, \mathbf{0}\right\} + (1-\lambda)\max\left\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}_2, \mathbf{0}\right\}\right\|_2 \\ \leq \ & \lambda\left\|\max\left\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}_1, \mathbf{0}\right\}\right\|_2 + (1-\lambda)\left\|\max\left\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}_2, \mathbf{0}\right\}\right\|_2, \end{aligned} \tag{16}$$

where the last inequality comes from the convexity of $\|\cdot\|_2$.

Compared to problem (13), the objective function of problem (15) is continuous in $\mathbf{q}$, but is still nonsmooth. We give the subdifferential [26] of the function $\|\max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\}\|_2$ in Proposition 5.1, which plays an important role in the following analysis and algorithm design. The proof of Proposition 5.1 is provided in Appendix C.

Proposition 5.1: Define $h_k(\mathbf{q}) = \|\max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\}\|_2$. Then

$$\partial h_k(\bar{\mathbf{q}}) = \left\{-\mathbf{A}_k^T\mathbf{s} \,|\, \mathbf{s} \geq \mathbf{0}, \|\mathbf{s}\|_2 \leq 1\right\},$$

where $\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}} = \mathbf{0}$. Further, denoting $\mathcal{N}_k{}^+ = \{n \,|\, (\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}})_n > 0\} \neq \emptyset$,

$$\nabla h_k(\bar{\mathbf{q}}) = -\frac{\sum_{n\in\mathcal{N}_k^+} (\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}})_n \left(\boldsymbol{a}_k^n\right)^T}{\|\max\{\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}}, \mathbf{0}\}\|_2} = \frac{-\mathbf{A}_k^T \max\{\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}}, \mathbf{0}\}}{\|\max\{\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}}, \mathbf{0}\}\|_2}.$$

One may ask why we do not use a smooth convex relaxation instead of (15)? The reason is that, with the use of the nonsmooth mixed ℓ_2/ℓ_1 norm, the formulation (15) is able to characterize and induce the *group sparsity* of the vector $\mathbf{x} := \max\{\mathbf{c} - \mathbf{A}\mathbf{q}, \mathbf{0}\}$ (recall that the objective of problem (13) actually is to find a feasible $\mathbf{q}$ such that the vector $\mathbf{x}$ is as sparse as possible in the group sense). To understand this, observe that the first term of the objective function of (15), the ℓ_1 norm of the vector $\left(\|\mathbf{x}_1\|_2, \|\mathbf{x}_2\|_2, \cdots, \|\mathbf{x}_K\|_2\right)^T$, is a good approximation of its ℓ_0 norm, which is equal to the ℓ_0 norm of the vector $\left(\|\mathbf{x}_1\|_0, \|\mathbf{x}_2\|_0, \cdots, \|\mathbf{x}_K\|_0\right)^T$. More discussions on using the ℓ_2/ℓ_1 norm to recover the group sparsity can be found in [27].

We now discuss the choice of the parameter α in (15). The parameter α in (15) should be chosen appropriately such that the following "Never-Over-Removal" property is satisfied: the solution of problem (15) should simultaneously support all links at their desired SINR targets with minimum total transmission power as long as all links in the network are simultaneously supportable. Otherwise, since the solution of (15) will be used to check the simultaneous supportability of all links and guide the links' removal, it may mislead us to remove the links unnecessarily. Theorem 5.1 gives an upper bound of the parameter α to guarantee the "Never-Over-Removal" property. The proof of Theorem 5.1 is mainly based on Lemma 4.1 and Proposition 5.1 (see Appendix D).

Theorem 5.1: Suppose there exists some vector $\mathbf{q}$ such that $\mathbf{0} \leq \mathbf{q} \leq \mathbf{e}$ and $\mathbf{A}\mathbf{q} \geq \mathbf{c}$. Then the solution of problem (15) with

$$0 \leq \alpha \leq \alpha_2 := \frac{\min\{\mathbf{c}\}}{K\max\{\bar{\mathbf{p}}\}} \tag{17}$$

can simultaneously support all links at their desired SINR targets with minimum total transmission power.

Combining (14) and (17), we propose to choose the parameter α in (15) according to

$$\alpha = \min\{c_1\alpha_1,\, c_2\alpha_2\}, \tag{18}$$

where $c_1, c_2 \in (0,\, 1)$ are two constants.

Link Removal Strategy. The solution of problem (15) can be used to guide the link removal process. In particular, by solving (15) with α given in (18), we know whether all links in the network can be simultaneously supported by simply checking if its solution $\bar{\mathbf{q}}$ satisfies $\mathbf{A}\bar{\mathbf{q}} \geq \mathbf{c}$. Furthermore, if all links in the network can not be simultaneously supported, we need to remove at least one link from the network. In particular, picking the worst sampled channel index $\bar{n}_k = \arg\max\{\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}}\}$ and letting $\bar{q}_k^e = \max\{\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}}\}$ for $k \in \mathcal{K}$, we may remove the link with the largest interference plus noise footprint [1]

$$k = \arg\max\left\{\sum_{j\neq k} |a_{k,j}^{\bar{n}_k}|\bar{q}_j + \sum_{j\neq k} |a_{j,k}^{\bar{n}_j}|\bar{q}_k + c_k^{\bar{n}_k}\right\}, \tag{19}$$

the link with the largest excess transmission power [4]

$$k = \arg\max\left\{\sum_{j\neq k} |a_{k,j}^{\bar{n}_k}|\bar{q}_j^e + \sum_{j\neq k} |a_{j,k}^{\bar{n}_j}|\bar{q}_k^e\right\}, \tag{20}$$

or the link with the maximum feasibility violation

$$k = \arg\max\left\{\|\max\{\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}}\}\|_2\right\}. \tag{21}$$

We remark that the above link removal strategies (19) and (20) are different from the ones given in [1], [4] due to the presence of channel normalization. We compared the three removal strategies (19), (20), and (21) in our simulations, and found that the first one works slightly better than the second one (in terms of the number of supported links and the total transmission power), and both of them works much better than the last one. Therefore, we shall use the removal strategy (19) in the proposed deflation algorithms. In the next subsection, we design efficient algorithms to solve the convex but nonsmooth problem (15).

B. Optimal Solution for Relaxation Problem (15)

By introducing auxiliary variables $\mathbf{x} = (\mathbf{x}_1; \mathbf{x}_2; \cdots; \mathbf{x}_K)$ and $\mathbf{t} = (t_1; t_2; \cdots; t_K)$, problem (15) can be transformed into the following SOCP

$$\begin{aligned} \min_{\mathbf{q},\mathbf{x},\mathbf{t}} \quad & \textstyle\sum_k t_k + \alpha \bar{\mathbf{p}}^T \mathbf{q} \\ \text{s.t.} \quad & \|\mathbf{x}_k\| \leq t_k, \ k \in \mathcal{K}, \\ & \mathbf{c} - \mathbf{A}\mathbf{q} \leq \mathbf{x}, \\ & \mathbf{0} \leq \mathbf{x}, \\ & \mathbf{0} \leq \mathbf{q} \leq \mathbf{e}, \end{aligned} \tag{22}$$

which is convex and smooth and can be solved by using the standard solver like CVX [28].

Problem (15) can also be solved directly by the subgradient projection method [29]. The subgradient of the objective of problem (15) can be easily obtained from Proposition 5.1, and the projection of a point $\mathbf{q}$ onto the box $\mathbf{Q} = \{\mathbf{q} \,|\, \mathbf{0} \leq \mathbf{q} \leq \mathbf{e}\}$ admits a closed-form solution, i.e.,

$$\text{Proj}_{\mathbf{Q}}(\mathbf{q}) = \min \{\mathbf{e}, \max \{\mathbf{q}, \mathbf{0}\}\}.$$

With an appropriate step size rule, the subgradient projection method is globally convergent. However, it has a slow convergence rate that is typically sublinear $O\left(1/\sqrt{t}\right)$, where t is the iteration index, and is sensitive to the choice of the initial step size.

Next, we develop a custom-design algorithm for problem (15) by first smoothing the problem and then applying the efficient projected alternate Barzilai-Borwein (PABB) algorithm [30], [31]. Specifically, we smooth problem (15) by

$$\begin{aligned} \min_{\mathbf{q}} \quad & f_\mu(\mathbf{q}) = \textstyle\sum_k \sqrt{\left\|\max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\}\right\|_2^2 + \mu^2} + \alpha \bar{\mathbf{p}}^T \mathbf{q} \\ \text{s.t.} \quad & \mathbf{0} \leq \mathbf{q} \leq \mathbf{e}, \end{aligned} \tag{23}$$

where $\mu > 0$ is the smoothing parameter. By Proposition 5.1, the objective function $f_\mu(\mathbf{q})$ of problem (23) is differentiable everywhere and its gradient is given by

$$\nabla f_\mu(\mathbf{q}) = \sum_{k \in \mathcal{K}} \frac{-\mathbf{A}_k^T \max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\}}{\sqrt{\left\|\max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\}\right\|_2^2 + \mu^2}}.$$

As the parameter μ tends to zero, $f_\mu(\mathbf{q})$ *uniformly* approaches the objective function in (15) and hence the solution of the smoothing problem (23) converges to the solution of problem (15).

Now we apply the PABB algorithm [30], [31] to solve the smoothing problem (23). The projected Barzilai-Borwein algorithm is developed to solve the optimization problem

$$\begin{aligned} \min_{\mathbf{x}} \quad & f(\mathbf{x}) \\ \text{s.t.} \quad & \mathbf{x} \in \mathbf{X}, \end{aligned}$$

where $f(\mathbf{x})$ is differentiable and the projection onto the feasible set $\mathbf{X}$ is relatively easy to compute. At the t-th iteration, the algorithm updates the design variable $\mathbf{x}$ by

$$\mathbf{x}(t+1) = \text{Proj}_{\mathbf{X}}\left[\mathbf{x}(t) - \alpha_{\text{BB}}(t)\nabla_{\mathbf{x}} f(\mathbf{x}(t))\right],$$

where the step size $\alpha_{\text{BB}}(t)$ is either

$$\alpha_{\text{BB1}}(t) = \frac{\mathbf{s}(t)^T\mathbf{s}(t)}{\mathbf{s}(t)^T\mathbf{y}(t)} \quad \text{or} \quad \alpha_{\text{BB2}}(t) = \frac{\mathbf{s}(t)^T\mathbf{y}(t)}{\mathbf{y}(t)^T\mathbf{y}(t)} \tag{24}$$

with $\mathbf{s}(t) = \mathbf{x}(t) - \mathbf{x}(t-1)$ and $\mathbf{y}(t) = \nabla_{\mathbf{x}} f(\mathbf{x}(t)) - \nabla_{\mathbf{x}} f(\mathbf{x}(t-1))$. In particular, the PABB algorithm alternately uses the large step size α_{BB1} and the small step size α_{BB2}.

When using the PABB algorithm to solve problem (23), we employ the *continuation* technique. That is, instead of using a tiny μ, we solve (23) with a series of values for μ, which are gradually decreasing, to obtain an approximate solution of (15). It turns out the continuation technique can reasonably improve the computational efficiency.

C. Convex Approximation-Based Deflation Algorithms

The basic idea of the proposed convex approximation-based deflation algorithm for the sampled JPAC problem (13) is to solve power control problem (15) and check whether all links can be supported or not; if not, remove a link from the network, and solve a reduced problem (15) again until all the remaining links are supported.

As in [10], to accelerate the deflation procedure (avoid solving too many optimization problems in the form of (15)), we derive an easy-to-check necessary condition for all links in the network to be simultaneously supported. If all links can be simultaneously served, there exists a vector $\mathbf{q}$ such that $\mathbf{0} \leq \mathbf{q} \leq \mathbf{e}$ and $\mathbf{A}\mathbf{q} \geq \mathbf{c}$. By the definition of $\mathbf{A}$, we have

$$\mathbf{q} \geq \left(\max\left\{\mathbf{c}_1\right\}; \max\left\{\mathbf{c}_2\right\}; \cdots; \max\left\{\mathbf{c}_K\right\}\right) := \mathbf{c}^{\max}.$$

Define

$$\boldsymbol{\mu} = \mathbf{A}^T\mathbf{e}$$

and set $\boldsymbol{\mu}_+ = \max\{\boldsymbol{\mu}, \mathbf{0}\}$ and $\boldsymbol{\mu}_- = \max\{-\boldsymbol{\mu}, \mathbf{0}\}$. It is obvious that $\boldsymbol{\mu} = \boldsymbol{\mu}_+ - \boldsymbol{\mu}_-$. Multiplying $\mathbf{e}^T$ from both sides of $\mathbf{A}\mathbf{q} \geq \mathbf{c}$, we get that $\left(\boldsymbol{\mu}_+ - \boldsymbol{\mu}_-\right)^T \mathbf{q} \geq \mathbf{e}^T\mathbf{c}$. Moreover, we can obtain

$$\boldsymbol{\mu}_+^T\mathbf{e} \geq \boldsymbol{\mu}_+^T\mathbf{q} \geq \boldsymbol{\mu}_-^T\mathbf{q} + \mathbf{e}^T\mathbf{c} \geq \boldsymbol{\mu}_-^T\mathbf{c}^{\max} + \mathbf{e}^T\mathbf{c},$$

where the first inequality is due to $\mathbf{q} \leq \mathbf{e}$ and the last one is due to $\mathbf{q} \geq \mathbf{c}^{\max}$. Therefore, the condition

$$\boldsymbol{\mu}_+^T\mathbf{e} - \left(\boldsymbol{\mu}_-^T\mathbf{c}^{\max} + \mathbf{e}^T\mathbf{c}\right) \geq 0 \tag{25}$$

is necessary for all links to be simultaneously supported.

We can use the necessary condition (25) in the link removal process. In particular, if (25) is violated, we should drop at least one link from the network. We propose to remove the link k_0 according to

$$k_0 = \arg\max_{k\in\mathcal{K}} \left\{ \sum_{j\neq k} |\bar{a}_{k,j}| + \sum_{j\neq k} |\bar{a}_{j,k}| + \bar{c}_k \right\}, \tag{26}$$

which corresponds to applying the SMART rule [4] to the normalized sampled channel and substituting $\mathbf{q} = \mathbf{e}$. In (26), $\bar{a}_{k,j}$ and $\bar{c}_k$ are the averaged sample channel gain and noise, i.e.,

$$\bar{\boldsymbol{a}}_k = (\bar{a}_{k,1}, \bar{a}_{k,2}, \cdots, \bar{a}_{k,K}) = \frac{\mathbf{e}^T\mathbf{A}_k}{N},\ \bar{c}_k = \frac{\mathbf{e}^T\mathbf{c}_k}{N},\ k \in \mathcal{K}.$$

The proposed convex approximation-based deflation algorithm framework for problem (13) is described in Algorithm 2. In the framework, if the power control problem (15) is solved via the SOCP formulation (22), we call the corresponding algorithm SOCP-D; while if problem (15) is solved via the smoothing problem (23) and the PABB algorithm, we call the corresponding algorithm PABB-D. The SOCP-D algorithm is of polynomial time complexity, i.e., it has a complexity of $O(N^{0.5}K^{3.5}(N+K))$, since it needs to solve K SOCP problems (22) and solving one SOCP problem in the form of (22) requires $O(N^{0.5}K^{2.5}(N+K))$ operations [32, Page 423]. We should remark that the postprocessing step (Step 5) in the framework aims at admitting the links removed in the preprocessing and admission control steps. Specifically, we enumerate all the removed links and admit one of them if it can be supported simultaneously with the already supported links. If there are more than one such candidates, we pick the one such that the minimum total transmission power is needed to simultaneously support it with the already supported links. The postprocessing step is terminated if no such candidate exists. The specification of the postprocessing step can be found in Appendix E.

Algorithm 2: A Convex Approximation-Based Deflation Algorithm Framework

Step 1. Initialization: Input data $(\mathbf{A}, \mathbf{c}, \bar{\mathbf{p}})$.

Step 2. Preprocessing: Remove link k_0 iteratively according to (26) until condition (25) holds true.

Step 3. Power control: Compute parameter α by (18) and solve problem (15); check whether all links are supported: if yes, go to **Step 5**; else go to **Step 4**.

Step 4. Admission control: Remove link k_0 according to (19), set $\mathcal{K} = \mathcal{K}/\left\{k_0\right\}$, and go to **Step 3**.

Step 5. Postprocessing: Check the removed links for possible admission.

VI. NUMERICAL SIMULATIONS

To illustrate the effectiveness and efficiency of the two proposed convex approximation-based deflation algorithms (SOCP-D and PABB-D), we present some numerical simulation results in this section. The number of supported links, the total transmission power, and the execution CPU time are used as the metrics for comparing different algorithms.

Simulation Setup: First, we generate the nominal channel parameters as in [1], i.e., each transmitter's location obeys the uniform distribution over a 2 Km $\times$ 2 Km square and the location of each receiver is uniformly generated in a disc with center at its corresponding transmitter and radius 400 m, excluding a radius of 10 m. The nominal channel gains are given by

$$\hat{g}_{k,j} = 1/d_{k,j}^4, \ \forall\ k,\ j \in \mathcal{K},$$

where $d_{k,j}$ is the Euclidean distance from the link of transmitter j to the link of receiver k. The nominal noise power is set to be

$$\hat{\eta}_k = -90 \text{ dBm}, \ \forall\ k \in \mathcal{K}.$$

Second, we generate samples of the channel parameters $g_{k,j}^n$ and η_k^n for $n = 1, 2, \cdots, N$. Specifically, for $n = 1$, we set

$$g_{k,j}^1 = \hat{g}_{k,j},\ \eta_k^1 = \hat{\eta}_k,\ k, j \in \mathcal{K}; \tag{27}$$

for $n = 2, 3, \cdots, N$, we set

$$\begin{aligned} g_{k,j}^n &= \hat{g}_{k,j} * \left(1 + S\frac{\xi_{k,j}^n}{\xi_{k,j}^{\max}}\right), \ k, j \in \mathcal{K}; \\ \eta_k^n &= \hat{\eta}_k * \left(1 + S\frac{\zeta_k^n}{\zeta_k^{\max}}\right), \ k \in \mathcal{K}. \end{aligned} \tag{28}$$

In the above, $\xi_{k,j}^n$ and ζ_k^n are samples of the corresponding random variables $\xi_{k,j}$ and ζ_k, both of which obey the standard Gaussian distribution, i.e., $\xi_{k,j} \sim \mathcal{N}(0,1)$ and $\zeta_k \sim \mathcal{N}(0,1)$; $\xi_{k,j}^{\max} = \max_{n=2,3,\cdots,N}\left\{|\xi_{k,j}^n|\right\}$ and $\zeta_k^{\max} = \max_{n=2,3,\cdots,N}\left\{|\zeta_k^n|\right\}$; and $S \in [0,1)$ is a given number, which guarantees that all generated $g_{k,j}^n$ and η_k^n are strictly greater than zero. Notice that the parameter S controls the magnitude of the perturbation added to the nominal channel parameters. The larger the parameter S is, the larger the perturbation is.

In addition, each link's SINR target is set to be $\gamma_k = 2$ dB $(\forall\ k \in \mathcal{K})$ and the power budget of the link of transmitter k is set to be $\bar{p}_k = 2\underline{p}_k$ $(\forall\ k \in \mathcal{K})$, where $\underline{p}_k$ is the minimum power needed by link k to meet its SINR requirement without any interference from other links under the nominal channel condition.

Benchmark: From the way of generating channel parameters, we know that if $g_{k,j}^n = \hat{g}_{k,j}$ and $\eta_k^n = \hat{\eta}_k$[2] for all $n = 1, 2, \cdots, N$, then the number of supported links in this case (without perturbation) should be greater than or equal to the number of supported links under the channel conditions with perturbation given in (27) and (28). In addition, if the number of supported links under these two cases are equal to each other, the total transmission power in the former channel condition should be less than the one in the latter channel condition. In particular, when all samples of the channel parameters are equal, the corresponding sampled JPAC problem (13) reduces to problem (3), which can be solved efficiently by the NLPD algorithm in [10]. The solution given by the NLPD algorithm will be used as the benchmark to compare with the two proposed algorithms, since the NLPD algorithm was reported to have the close-to-global-optimal performance in [10]. For fair comparison, we choose the parameter α according to (18) and use the removal strategy (19) in the NLPD algorithm as in the two proposed algorithms.

Choice of Parameters: We set the parameters ϵ, δ, and K in (9) to be 0.1, 0.05, and 10, respectively. We remark that K in equation (9) is the number of supported links but not the

---

[2] This corresponds to the special case where $S = 0$.

TABLE I

STATISTICS OF THE NUMBER OF SUPPORTED LINKS OF 200 MONTE-CARLO RUNS.

Number of Total Links	Parameter S	Algorithm	Statistics of the Number of Supported Links
4	0	Benchmark	664=2*20+3*96+4*84
4	0.1	SOCP-D/PABB-D	647=2*26+3*101+4*73
4	0.2	SOCP-D/PABB-D	619=1*2+2*34+3*107+4*57
12	0	Benchmark	1468=5*8+6*35+7*65+8*68+9*21+10*3
12	0.1	SOCP-D/PABB-D	1398=4*1+5*13+6*49+7*75+8*51+9*8+10*3
12	0.2	SOCP-D/PABB-D	1291=4*5+5*27+6*78+7*57+8*28+9*5
20	0	Benchmark	1988=6*1+7*5+8*21+9*49+10*61+11*39+12*16+13*5+14*3
20	0.1	SOCP-D/PABB-D	1841=5*1+6*3+7*17+8*39+9*63+10*40+11*27+12*7+13*3
20	0.2	SOCP-D/PABB-D	1676=6*8+7*44+8*66+9*43+10*27+11*9+12*3
28	0	Benchmark	2345=9*11+10*25+11*61+12*48+13*31+14*19+15*2+16*1+17*2
28	0.1	SOCP-D/PABB-D	2189=8*4+9*23+10*54+11*56+12*39+13*13+14*8+15*3
28	0.2	SOCP-D/PABB-D	1975=7*8+8*23+9*51+10*56+11*34+12*23+13*4+14*1

number of total links. Substituting these parameters in (9), we obtain $N^* = 200$, and we set $N = 200$ in all of our simulations. Both of the parameters c_1 and c_2 in (18) are set to be 0.999. When applying the PABB algorithm with the continuation technique to solve the power control problem (15), we always set the smoothing parameter μ to be 1 at first, and then gradually decrease it by multiplying a factor of 0.1 until it becomes less than 10^{-4}. Two values are used for the S in (28), which are 0.1 and 0.2. Finally, we use CVX [28] to solve the SOCP problems in the SOCP-D algorithm.

Simulation Results and Analysis: Table I summarizes the statistics of the number of supported links of 200 Monte-Carlo runs in two cases where $S = 0.1$ and 0.2, respectively. For instance, "$664 = 2 * 20 + 3 * 96 + 4 * 84$" in the fourth column of Table I stands for that when $K = 4$, 664 links are supported in these 200 Monte-Carlo runs, and amongest them, 2 links are supported 20 times, 3 links are supported 96 times, and 4 links are supported 88 times. Figs. 1, 2, and 3 are obtained by averaging over the 200 Monte-Carlo runs. They plot the average number of supported links, the average total transmission power, and the average execution CPU time of the proposed SOCP-D and PABB-D algorithms and the benchmark versus different number of total links, respectively.

We can observe from Fig. 1 that the number of supported links by the two proposed algorithms

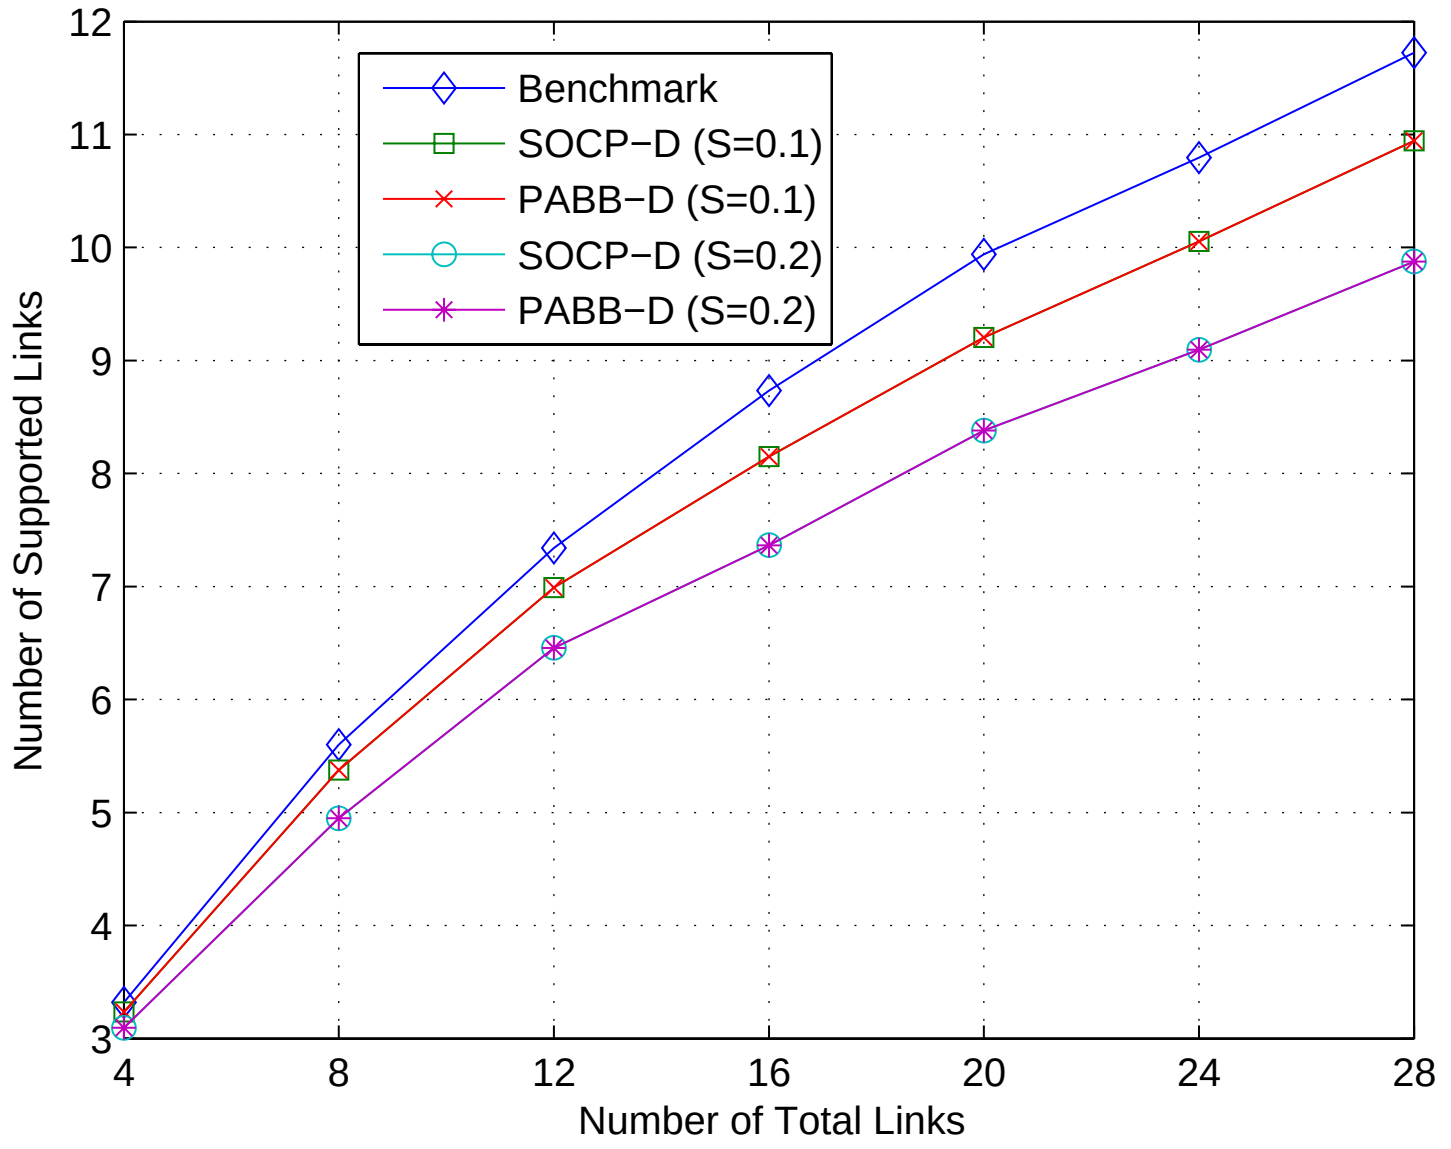

Fig. 1. Average number of supported links versus the number of total links with $S = 0.1$ and 0.2.

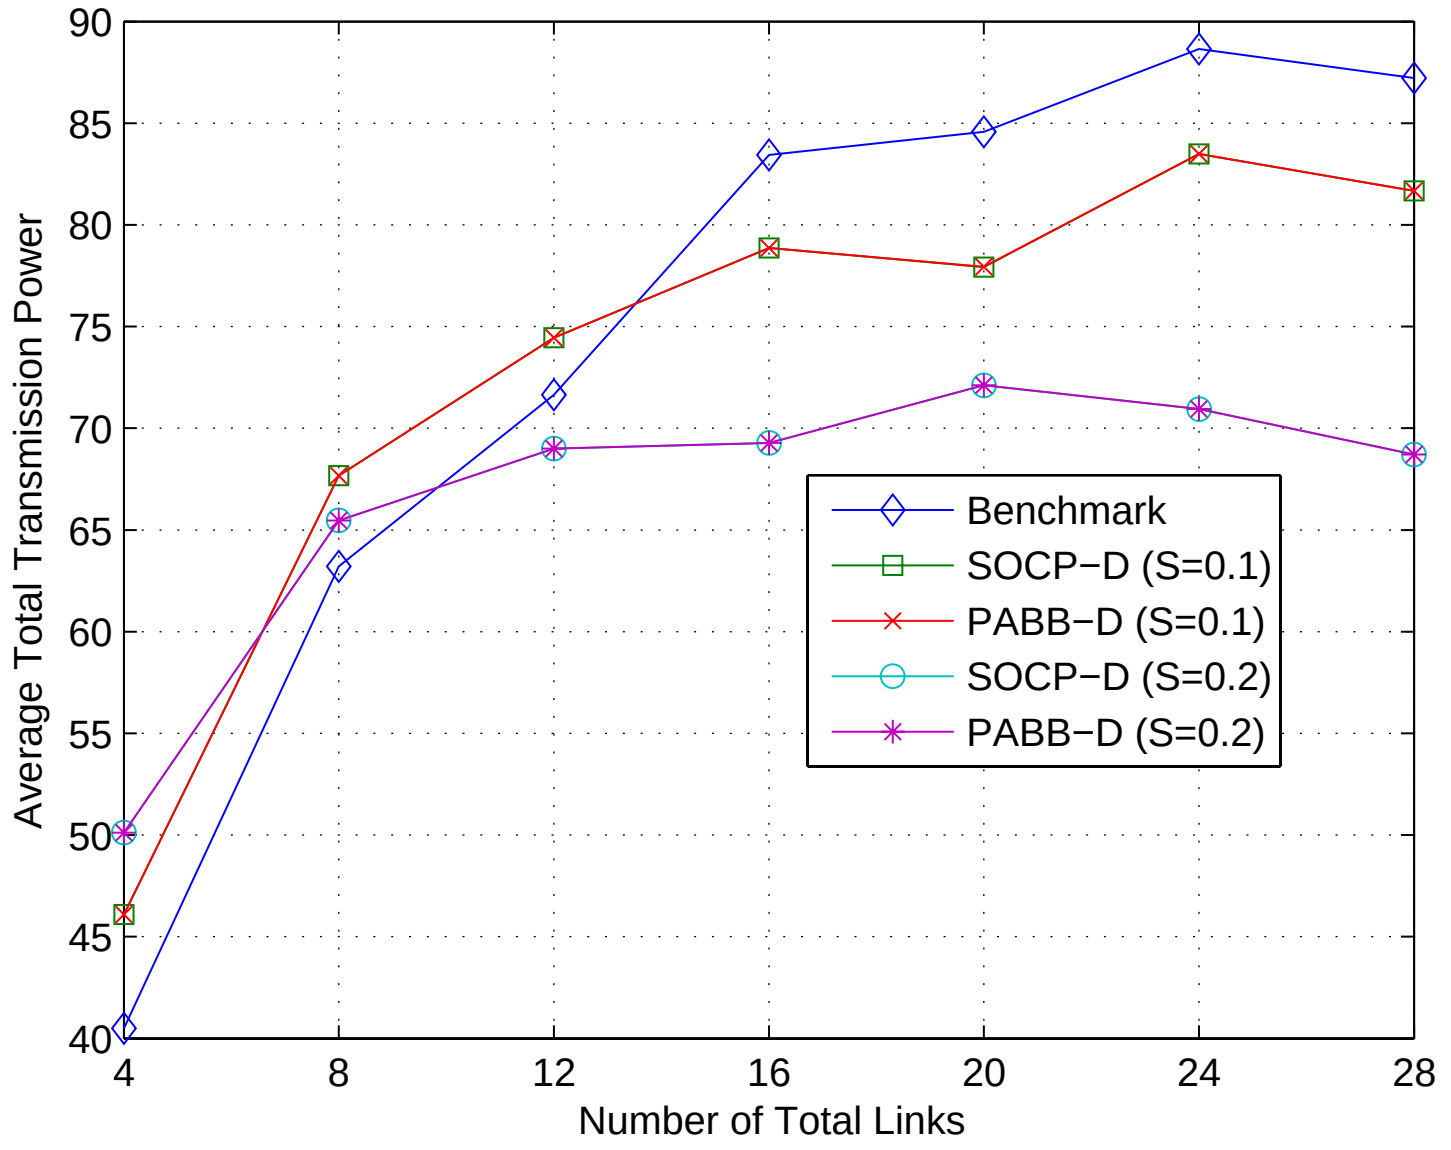

Fig. 2. Average total transmission power versus the number of total links with $S = 0.1$ and 0.2.

is slightly less than the benchmark, which serves as an upper bound of the number of supported links by the proposed algorithms. Table I, Fig. 1, and Fig. 2 show that the two proposed

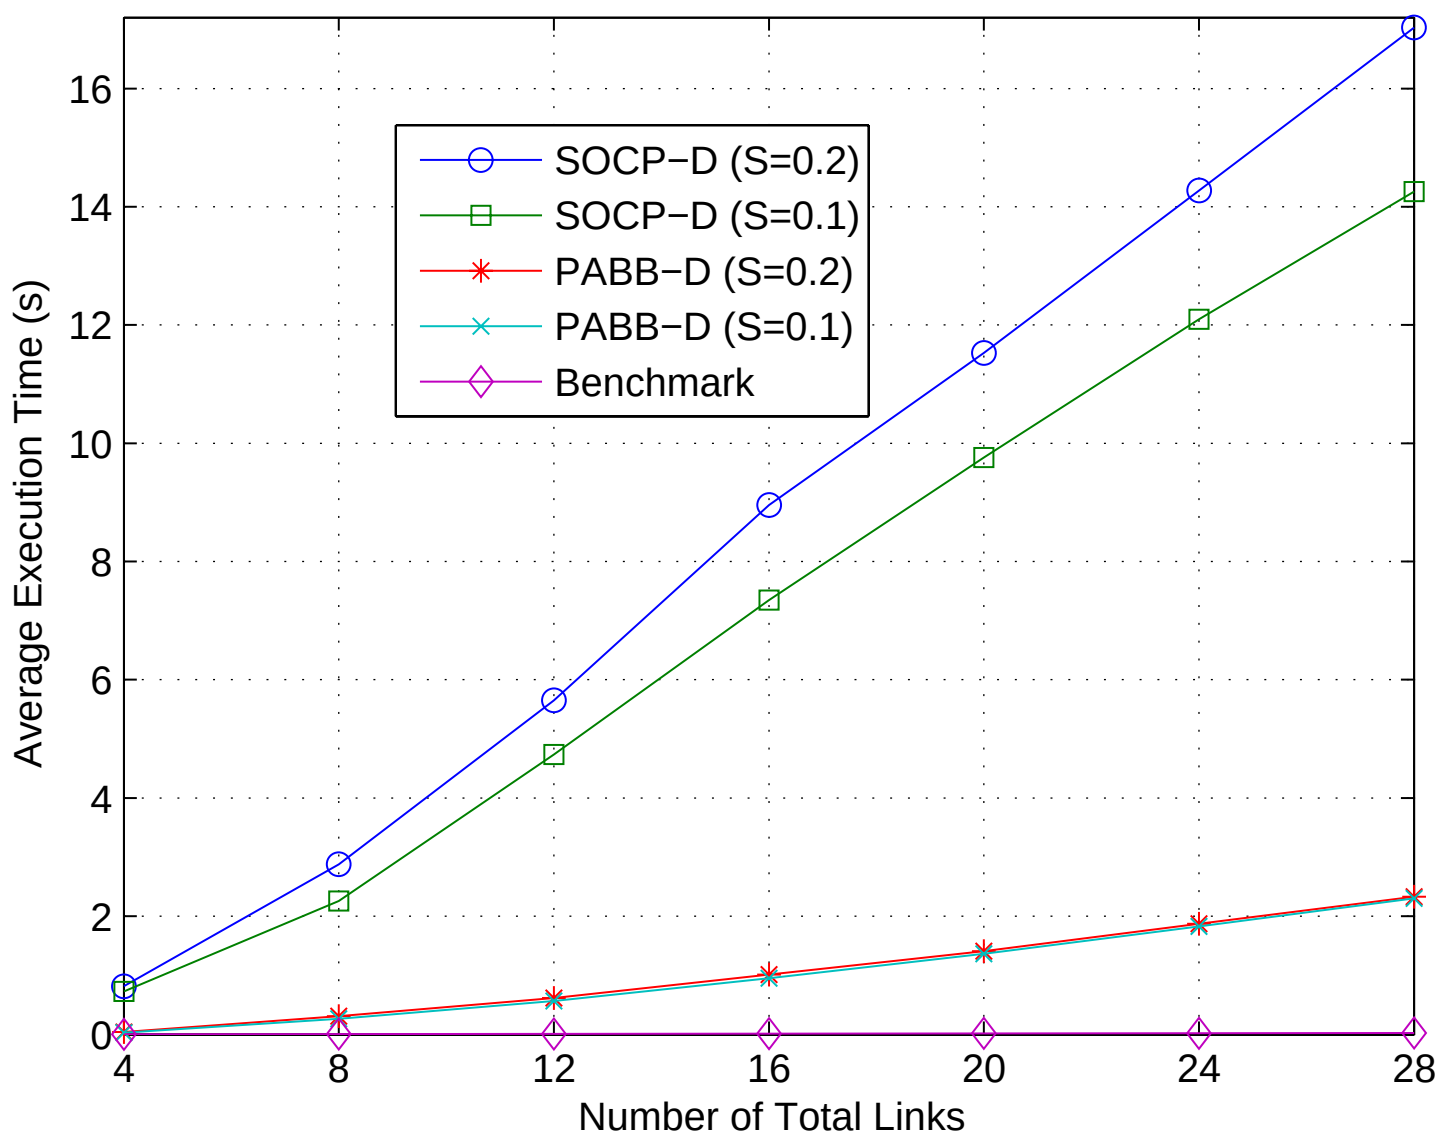

Fig. 3. Average execution time (in seconds) versus the number of total links with $S = 0.1$ and 0.2.

algorithms always return the same solution to the sampled JPAC problem (13), i.e., supporting same number of links with same total transmission power. However, Fig. 3 shows that the PABB-D algorithm substantially outperforms the SOCP-D algorithm in terms of the average CPU time. This is not surprising, since in each power control step (i.e., solving problem (15)), the custom-design algorithm is used to carry out power control in the PABB-D algorithm while a general-purpose solver CVX is used to update power in the SOCP-D algorithm.

We know the fact that when we add the perturbation to the nominal channel parameters (cf. (27) and (28)), either the number of supported links under the perturbed channel condition equals the number of supported links under the nominal channel condition but the total power transmitted in the former case is greater than the one in the later case, or the number of supported links in the perturbed channel condition is less than the one in the nominal channel condition. As plotted in Fig. 2, as the number of total links in the network increases from 24 to 28, the difference of the average total transmission power by the benchmark and the two proposed algorithms increases. This, combining the above fact, implies the difference of the number of supported links by the benchmark and the two proposed algorithms will become large as the number of links in the network increases from 24 to 28. This is consistent with the simulation result in Fig. 1.

Comparing the two scenarios where $S = 0.1$ and $S = 0.2$, it can be seen from Fig. 1 that the number of supported links by the two proposed algorithms in the scenario $S = 0.2$ is less than the one in the scenario $S = 0.1$. This makes sense because the magnitude of the perturbation in the scenario $S = 0.1$ is generally smaller than the one in the scenario $S = 0.2$. The fact that the number of supported links in the scenario $S = 0.1$ is larger than the one in the scenario $S = 0.2$ also reveals the reason why the average total transmission power in the former case is larger than the one in the latter case as shown in Fig. 2. Notice that in Fig. 2, the average total transmission power in the scenario $S = 0.1$ is smaller than the one in the scenario $S = 0.2$ when $K = 4$. This is because in this case the average number of supported links in the two scenarios are nearly equal to each other. We also point out that the execution CPU time of the two proposed deflation algorithms mainly depends on how many times the power control problem (15) is solved. In general, the larger number of links are supported, the smaller number of links are removed from the network and the smaller number of power control problems in form of (15) are solved. Therefore, the average CPU time of the proposed algorithms in the scenario $S = 0.1$ is larger than the one in the scenario $S = 0.2$; see Fig. 3.

VII. CONCLUSIONS

In this paper, we have considered the chance SINR constrained JPAC problem, and have proposed two sample approximation-based deflation approaches for the problem. We first approximated the computationally intractable chance SINR constraints by sampling, and then reformulated the sampled JPAC problem as a one-stage group sparse ℓ_0-minimization problem. Furthermore, we relaxed the NP-hard ℓ_0-minimization problem to a convex ℓ_1-minimization problem (equivalent to an SOCP) and used its solution to check the simultaneous supportability of all links and guide an iterative link removal procedure (deflation), resulting in efficient deflation algorithms (SOCP-D and PABB-D).

The proposed approaches are particularly attractive for practical implementations for the following reasons. First, since the proposed approaches are based on sample approximations, they do not require explicit CDI but only need samples of channel realizations. Consequently, the proposed approaches are distributionally robust. Second, the two proposed approaches enjoy a low computational complexity. The SOCP-D approach has a polynomial time complexity. To further improve the computational efficiency, the special structure of the SOCP relaxation problem is exploited, and an efficient algorithm, PABB-D, is custom designed for solving it. The PABB-D algorithm significantly outperforms the SOCP-D algorithm in terms of the execution CPU time. Finally, our simulation results show that the proposed approaches are very effective by using the nonrobust NLPD algorithm as the benchmark.

ACKNOWLEDGMENT

The first author wishes to thank Professor Yu-Hong Dai of Chinese Academy of Sciences and Dr. Mingyi Hong of University of Minnesota for many useful discussions.

APPENDIX A

Proof of Theorem 4.2: It is simple to see the equivalence between problem (11) and the intermediate problem

$$\begin{array}{ll}\min\limits_{\mathbf{q}} & \sum_k \|\max\{\mathbf{c}_k-\mathbf{A}_k\mathbf{q},\mathbf{0}\}\|_0 \\ \text{s.t.} & \mathbf{0}\leq\mathbf{q}\leq\mathbf{e}\end{array} \tag{29}$$

in the sense that the optimal value of problem (11) is M if and only if the minimum value of problem (29) is $K-M$.

We now establish the equivalence between problems (13) and (29) (in the sense of supporting the maximum number of links). We claim that the optimal value of (29) is M if and only if the optimal value of (13) is in the interval $(M, M+1)$. We argue the "only if" and "if" directions separately. Recall the fact $0<\alpha<\alpha_1=1/\bar{\mathbf{p}}^T\mathbf{e}$ (cf. (14)) which implies

$$\alpha\,\bar{\mathbf{p}}^T\mathbf{q}<1, \quad \text{for any } \mathbf{0}\leq\mathbf{q}\leq\mathbf{e}.$$

Consequently, the total contribution from the second term in the objective function of (13) cannot exceed 1, regardless of the power allocation $\mathbf{q}$. This immediately shows that if the optimal value of (29) is M, then the optimal value of (13) must be in the interval $(M, M+1)$. To argue the converse, we note that the function $\sum_{k\in\mathcal{K}}\|\max\{\mathbf{c}_k-\mathbf{A}_k\mathbf{q},\mathbf{0}\}\|_0$ is discontinuous with an increment of 1, implying that

$$\begin{array}{rl} & \sum\limits_{k\in\mathcal{K}}\|\max\{\mathbf{c}_k-\mathbf{A}_k\mathbf{q},\mathbf{0}\}\|_0+\alpha\,\bar{\mathbf{p}}^T\mathbf{q} \\ \geq & \sum\limits_{k\in\mathcal{K}}\|\max\{\mathbf{c}_k-\mathbf{A}_k\mathbf{q},\mathbf{0}\}\|_0 \\ \geq & M+1>M+\alpha\,\bar{\mathbf{p}}^T\mathbf{q},\end{array} \tag{30}$$

for any choice of $\mathbf{0} \le \mathbf{q} \le \mathbf{e}$, as long as $\sum_{k\in\mathcal{K}} \|\max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\}\|_0 > M$. Thus, the global minimum of (13) must be achieved at a power allocation for which

$$\sum_{k\in\mathcal{K}} \|\max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\}\|_0 = M$$

holds, i.e., $\sum_{k\in\mathcal{K}} \|\max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\}\|_0$ is fully minimized by (29). This establishes the equivalence between (29) and (13).

Finally, if there are multiple sets of M links that are simultaneously supportable, then they all induce the same objective value in the first term of the objective function in (13). In this case, the second term (i.e., $\bar{\mathbf{p}}^T\mathbf{q}$) will play the role to select the one set of M links which requires the least amount of total transmission power. In other words, $\bar{\mathbf{p}}^T\mathbf{q}^* = \mathbf{e}^T\mathbf{p}^*$ is the minimum total power required to support any M links in the network.

APPENDIX B

Proof of Proposition 4.1: We prove Proposition 4.1 by contraction. Assume that link k is supported in (13) but $\mathbf{A}_k\mathbf{q}^* > \mathbf{c}_k$ holds true. Then we can construct a feasible point $\hat{\mathbf{q}}$ satisfying

$$\sum_k \|\max\{\mathbf{c}_k - \mathbf{A}_k\hat{\mathbf{q}}, \mathbf{0}\}\|_0 + \alpha\bar{\mathbf{p}}^T\hat{\mathbf{q}} < \sum_k \|\max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}^*, \mathbf{0}\}\|_0 + \alpha\bar{\mathbf{p}}^T\mathbf{q}^*. \tag{31}$$

Define $\hat{\mathbf{q}} = (\hat{q}_1, \hat{q}_2, \cdots, \hat{q}_K)^T$ with

$$\hat{q}_j = \begin{cases} \max\{(\mathbf{E}_k - \mathbf{A}_k)\mathbf{q}^* + \mathbf{c}_k\}, & \text{if } j = k; \\ q_j^*, & \text{if } j \neq k. \end{cases}$$

Recalling the definitions of $\mathbf{E}_k$ and $\mathbf{A}_k$, we know $\mathbf{E}_k - \mathbf{A}_k$ is a nonnegative matrix, and thus

$$\hat{q}_k = \max\{(\mathbf{E}_k - \mathbf{A}_k)\mathbf{q}^* + \mathbf{c}_k\} > 0.$$

Since

$$\mathbf{A}_k\mathbf{q}^* = \mathbf{E}_k\mathbf{q}^* - (\mathbf{E}_k - \mathbf{A}_k)\mathbf{q}^* = q_k^*\mathbf{e} - (\mathbf{E}_k - \mathbf{A}_k)\mathbf{q}^* > \mathbf{c}_k,$$

it follows that

$$q_k^* > \max\{(\mathbf{E}_k - \mathbf{A}_k)\mathbf{q}^* + \mathbf{c}_k\} = \hat{q}_k.$$

Hence, $\hat{\mathbf{q}}$ is feasible (i.e., $\mathbf{0} \le \hat{\mathbf{q}} \le \mathbf{q}^* \le \mathbf{e}$ and the inequality $\hat{\mathbf{q}} \le \mathbf{q}^*$ holds true strictly for the k-th entry) and

$$\bar{\mathbf{p}}^T\hat{\mathbf{q}} < \bar{\mathbf{p}}^T\mathbf{q}^*. \tag{32}$$

Moreover, it follows from the definition of $\hat{q}_k$ that $\mathbf{A}_k\hat{\mathbf{q}} \geq \mathbf{c}_k$. For any $j \neq k$, if $\mathbf{A}_j\mathbf{q}^* \geq \mathbf{c}_j$, we have $\mathbf{A}_j\hat{\mathbf{q}} - \mathbf{c}_j \geq \mathbf{A}_j\mathbf{q}^* - \mathbf{c}_j \geq \mathbf{0}$, where the first inequality is due to the fact that all entries of $\mathbf{A}_j$ except its j-th column are nonpositive and the fact $\hat{\mathbf{q}} \leq \mathbf{q}^*$. Consequently, there holds $\mathcal{J}^* \subset \hat{\mathcal{J}}$, where $\mathcal{J}^* = \{j \,|\, \mathbf{A}_j\mathbf{q}^* \geq \mathbf{c}_j\}$ and $\hat{\mathcal{J}} = \{j \,|\, \mathbf{A}_j\hat{\mathbf{q}} \geq \mathbf{c}_j\}$. Thus, we have

$$\begin{aligned} & \sum\nolimits_{k\in\mathcal{K}} \|\max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}^*, \mathbf{0}\}\|_0 \\ = \;& \sum\nolimits_{k\notin\mathcal{J}^*} \|\max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}^*, \mathbf{0}\}\|_0 \\ \geq \;& \sum\nolimits_{k\notin\hat{\mathcal{J}}} \|\max\{\mathbf{c}_k - \mathbf{A}_k\hat{\mathbf{q}}, \mathbf{0}\}\|_0 \\ = \;& \sum\nolimits_{k\in\mathcal{K}} \|\max\{\mathbf{c}_k - \mathbf{A}_k\hat{\mathbf{q}}, \mathbf{0}\}\|_0. \end{aligned} \tag{33}$$

Combining (32) and (33) yields (31), which contradicts the optimality of $\mathbf{q}^*$. This completes the proof of Proposition 4.1.

APPENDIX C

To prove Proposition 5.1, we first consider the simple case where $h(\mathbf{q}) = \|\max\{\mathbf{q}, \mathbf{0}\}\|_2$.

Lemma C.1: Suppose $h(\mathbf{q}) = \|\max\{\mathbf{q}, \mathbf{0}\}\|_2$. Then $\partial h(\mathbf{0}) = \{\mathbf{s} \,|\, \mathbf{s} \geq \mathbf{0}, \|\mathbf{s}\|_2 \leq 1\}$. If there exists i such that $(\mathbf{q})_i > 0$, then $h(\mathbf{q})$ is differentiable and

$$\nabla h(\mathbf{q}) = \frac{\max\{\mathbf{q}, \mathbf{0}\}}{\|\max\{\mathbf{q}, \mathbf{0}\}\|_2}. \tag{34}$$

Proof: Define $\mathcal{S} = \{\mathbf{s} \,|\, \mathbf{s} \geq \mathbf{0}, \|\mathbf{s}\|_2 \leq 1\}$. We claim $\partial h(\mathbf{0}) = \mathcal{S}$. On one hand, taking any $\mathbf{s} \in \mathcal{S}$, we have that

$$h(\mathbf{q}) = \|\max\{\mathbf{q}, \mathbf{0}\}\|_2 \geq \mathbf{s}^T\max\{\mathbf{q}, \mathbf{0}\} \geq \mathbf{s}^T\mathbf{q} = h(\mathbf{0}) + \mathbf{s}^T(\mathbf{q} - \mathbf{0}),\ \forall\ \mathbf{q},$$

where the first inequality is due to the Cauchy-Schwarz inequality and the fact $\|\mathbf{s}\|_2 \leq 1$, and the second inequality is due to $\mathbf{s} \geq \mathbf{0}$. This shows that $\mathcal{S} \subset \partial h(\mathbf{0})$ according to the definition of $\partial h(\mathbf{0})$ [26]. On the other hand, to show $\partial h(\mathbf{0}) \subset \mathcal{S}$, it suffices to show that any point $\mathbf{s} \notin \mathcal{S}$ is not a subgradient of $h(\mathbf{q})$ at point $\mathbf{0}$. In particular, if $\|\mathbf{s}\|_2 > 1$, then

$$h(\mathbf{q}) = \|\max\{\mathbf{q}, \mathbf{0}\}\|_2 \leq \|\mathbf{q}\|_2 = 1 < \|\mathbf{s}\|_2 = \mathbf{s}^T\mathbf{q} = h(\mathbf{0}) + \mathbf{s}^T(\mathbf{q} - \mathbf{0})$$

with $\mathbf{q} = \mathbf{s}/\|\mathbf{s}\|_2$. Thus, the subgradient $\mathbf{s}$ of $h(\mathbf{q})$ at point $\mathbf{0}$ must satisfy $\|\mathbf{s}\|_2 \leq 1$. If $\|\mathbf{s}\|_2 \leq 1$ but $(\mathbf{s})_1 < 0$ (without loss of generality), we test the point $\mathbf{q} = (-1, 0, \cdots, 0)^T$, and obtain

$$h(\mathbf{q}) = \|\max\{\mathbf{q}, \mathbf{0}\}\|_2 = 0 < -(\mathbf{s})_1 = \mathbf{s}^T\mathbf{q} = h(\mathbf{0}) + \mathbf{s}^T(\mathbf{q} - \mathbf{0}).$$

Consequently, the subgradient s of $h(\mathbf{q})$ at point $\mathbf{0}$ must satisfy $\|\mathrm{s}\|_2 \leq 1$ and $\mathrm{s} \geq \mathbf{0}$. Hence, $\partial h(\mathbf{0}) = \{\mathbf{s} \,|\, \mathbf{s} \geq \mathbf{0}, \|\mathbf{s}\|_2 \leq 1\}$.

Next, we show that $h(\mathbf{q})$ is differentiable at the point $\mathbf{q}$ which has at least one positive entry, and the corresponding gradient is given in (34). In fact, although the function $\max\{q, 0\}$ is nondifferentiable at point $q = 0$, its square $f(q) = (\max\{q, 0\})^2$ is differentiable everywhere; i.e.,

$$f'(q) = \begin{cases} 0, & \text{if } q \leq 0; \\ 2q, & \text{if } x > 0. \end{cases}$$

According to the composite rule of differentiation, we know that the gradient of $h(\mathbf{q})$ is given by (34). This completes the proof of Lemma C.1. ■

Equipping with Lemma C.1, we now can prove Proposition 5.1. Assume that $\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}} = \mathbf{0}$. Then for any $\mathbf{q}$ and any s satisfying $\|\mathrm{s}\|_2 \leq 1$ and $\mathrm{s} \geq \mathbf{0}$, we have

$$\begin{aligned} h_k(\mathbf{q}) &= \|\max\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\}\|_2 \\ &\geq \mathbf{s}^T(\mathbf{c}_k - \mathbf{A}_k\mathbf{q}) \;\; \text{(from Lemma C.1)} \\ &= \mathbf{s}^T(\mathbf{A}_k\bar{\mathbf{q}} - \mathbf{A}_k\mathbf{q}) \\ &= \left(-\mathbf{A}_k^T\mathbf{s}\right)^T(\mathbf{q} - \bar{\mathbf{q}}) \\ &= \|\max\{\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}}, \mathbf{0}\}\|_2 + \left(-\mathbf{A}_k^T\mathbf{s}\right)^T(\mathbf{q} - \bar{\mathbf{q}}) \\ &= h_k(\bar{\mathbf{q}}) + \left(-\mathbf{A}_k^T\mathbf{s}\right)^T(\mathbf{q} - \bar{\mathbf{q}}), \end{aligned} \tag{35}$$

which shows that all vectors in $\left\{-\mathbf{A}_k^T\mathbf{s} \,|\, \mathbf{s} \geq \mathbf{0}, \|\mathbf{s}\|_2 \leq 1\right\}$ are subgradients of $h_k(\mathbf{q})$ at point $\bar{\mathbf{q}}$. In the same way as in the proof of Lemma C.1, we can show that if s does not satisfy $\|\mathbf{s}\|_2 \leq 1$ and $\mathbf{s} \geq \mathbf{0}$, the inequality in (35) will violate for some special choices of $\mathbf{q}$. Hence, $\partial h_k(\bar{\mathbf{q}}) = \left\{-\mathbf{A}_k^T\mathbf{s} \,|\, \mathbf{s} \geq \mathbf{0}, \|\mathbf{s}\|_2 \leq 1\right\}$.

If $\mathcal{N}_k^+ \neq \emptyset$, we know from the composite rule of differentiation and Lemma C.1 that $h_k(\bar{\mathbf{q}})$ is differentiable and its gradient is given by

$$\nabla h_k(\bar{\mathbf{q}}) = -\frac{\sum_{n \in \mathcal{N}_k^+} (\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}})_n \left(\boldsymbol{a}_k^n\right)^T}{\|\max\{\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}}, \mathbf{0}\}\|_2} = \frac{-\mathbf{A}_k^T \max\{\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}}, 0\}}{\|\max\{\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}}, 0\}\|_2}.$$

This completes the proof of Proposition 5.1.

APPENDIX D

Proof of Theorem 5.1: Suppose all links in the network can be simultaneously supported (i.e., there exists $\mathbf{0} \leq \mathbf{q} \leq \mathbf{e}$ satisfying $\mathbf{A}\mathbf{q} \geq \mathbf{c}$) and $\bar{\mathbf{q}}$ is the solution to problem

$$\begin{aligned} \min_{\mathbf{q}} \quad & \bar{\mathbf{p}}^T \mathbf{q} \\ \text{s.t.} \quad & \mathbf{A}\mathbf{q} - \mathbf{c} \geq \mathbf{0}, \\ & \mathbf{0} \leq \mathbf{q} \leq \mathbf{e}. \end{aligned} \tag{36}$$

To prove Theorem 5.1, it suffices to show that $\bar{\mathbf{q}}$ is also the solution to problem (15) with $\alpha \in [0, \alpha_2]$. Moreover, to show $\bar{\mathbf{q}}$ is the solution to problem (15), we only need to show that the subdifferential of the objective function of problem (15) at point $\bar{\mathbf{q}}$ contains $\mathbf{0}$ [26]. Next, we claim the latter is true.

We first characterize the subdifferential of the objective function of problem (15) at point $\bar{\mathbf{q}}$. It follows from Lemma 4.1 that there exists $\mathcal{I} = \{n_1, n_2, \cdots, n_K\}$ such that $\bar{\mathbf{q}}$ is the solution to the following linear system

$$\mathbf{A}_{\mathcal{I}}\mathbf{q} := \left[\boldsymbol{a}_1^{n_1}; \boldsymbol{a}_2^{n_2}; \cdots; \boldsymbol{a}_K^{n_K}\right]\mathbf{q} = \left(c_1^{n_1}; c_2^{n_2}; \cdots; c_K^{n_K}\right) := \mathbf{c}_{\mathcal{I}}.$$

Recalling the definition of $\boldsymbol{a}_k^n$ (see Subsection IV-B), we know that $\mathbf{I} - \mathbf{A}_{\mathcal{I}}$ is a nonnegative matrix. Moreover, from [33, Theorem 1.15], $\mathbf{A}_{\mathcal{I}}$ is nonsingular, $\mathbf{A}_{\mathcal{I}}^{-1}$ is nonnegative, and

$$0 < \mathbf{e}^T \mathbf{A}_{\mathcal{I}}^{-1} \mathbf{c}_{\mathcal{I}} = \mathbf{e}^T \bar{\mathbf{q}} \leq K. \tag{37}$$

Define $h_k(\mathbf{q}) = \left\|\max\left\{\mathbf{c}_k - \mathbf{A}_k\mathbf{q}, \mathbf{0}\right\}\right\|_2$ for $k \in \mathcal{K}$. It follows from [26, Theorem 23.8] that the subdifferential of the objective function of problem (15) at point $\bar{\mathbf{q}}$ is given by

$$\left\{\sum_{k \in \mathcal{K}} \mathbf{g}_k + \alpha\bar{\mathbf{p}} \,|\, \mathbf{g}_k \in \partial h_k(\bar{\mathbf{q}}),\, k \in \mathcal{K}\right\}.$$

According to Proposition 5.1, $\partial h_k(\bar{\mathbf{q}})$ *contains*[3] all vectors in

$$\mathcal{S}_k = \left\{-s_k \left(\boldsymbol{a}_k^{n_k}\right)^T \,|\, 0 \leq s_k \leq 1\right\}. \tag{38}$$

Therefore, all vectors in

$$\mathcal{S} = \left\{-\mathbf{A}_{\mathcal{I}}^T \mathbf{s} + \alpha\bar{\mathbf{p}} \,|\, \mathbf{0} \leq \mathbf{s} \leq \mathbf{e}\right\} = \left\{-\sum_{k \in \mathcal{K}} s_k \left(\boldsymbol{a}_k^{n_k}\right)^T + \alpha\bar{\mathbf{p}} \,|\, 0 \leq s_k \leq 1, k \in \mathcal{K}\right\}$$

---

[3] The subdifferential of $h_k(\mathbf{q})$ at point $\bar{\mathbf{q}}$ is not necessarily equal to $\mathcal{S}_k$ in (38). This is because that some other entries (except the n_k-th entry) of the vector $\mathbf{c}_k - \mathbf{A}_k\bar{\mathbf{q}}$ might also be zero.

are subgradients of the objective function of problem (15) at point $\bar{\mathbf{q}}$.

If $\mathbf{0} \in \mathcal{S}$, the subdifferential of the objective function of problem (15) at point $\bar{\mathbf{q}}$ contains $\mathbf{0}$ [26], which completes the proof of Theorem 5.1. In fact, consider the vector $\mathbf{s} = \alpha \mathbf{A}_{\mathcal{I}}^{-T} \bar{\mathbf{p}}$. It is a nonnegative vector (since $\mathbf{A}_{\mathcal{I}}^{-1}$ is nonnegative), and each of its entries is less than or equal to 1 as long as $\alpha \leq \alpha_2$. This is because

$$\begin{aligned} \mathbf{e}^T \mathbf{s} &= \mathbf{e}^T \alpha \mathbf{A}_{\mathcal{I}}^{-T} \bar{\mathbf{p}} \\ &\leq \alpha \max\{\bar{\mathbf{p}}\} \, \mathbf{e}^T \mathbf{A}_{\mathcal{I}}^{-T} \mathbf{e} \\ &\leq \alpha \frac{\max\{\bar{\mathbf{p}}\}}{\min\{\mathbf{c}_{\mathcal{I}}\}} \mathbf{c}_{\mathcal{I}}^T \mathbf{A}_{\mathcal{I}}^{-T} \mathbf{e} \\ &\overset{(a)}{\leq} \alpha \frac{\max\{\bar{\mathbf{p}}\}}{\min\{\mathbf{c}\}} K \\ &\leq 1, \end{aligned} \tag{39}$$

where (a) is due to (37) and the fact $\min\{\mathbf{c}\} \leq \min\{\mathbf{c}_{\mathcal{I}}\}$. Substituting $\mathbf{s} = \alpha \mathbf{A}_{\mathcal{I}}^{-T} \bar{\mathbf{p}}$ into $\mathcal{S}$, we obtain

$$-\mathbf{A}_{\mathcal{I}}^T \mathbf{s} + \alpha \bar{\mathbf{p}} = -\mathbf{A}_{\mathcal{I}}^T \left(\alpha \mathbf{A}_{\mathcal{I}}^{-T} \bar{\mathbf{p}} \right) + \alpha \bar{\mathbf{p}} = \mathbf{0}.$$

Thus, $\mathbf{0} \in \mathcal{S}$.

APPENDIX E

```
Algorithm 3: Specification of Postprocessing
Step 1. Initialization: Input the set of supported links $\mathcal{S}$ and the set of removed links $\mathcal{R}$.
Step 2. Iteration:
        For $j \in \mathcal{R}$,
          - Solve the linear program
                $\min_{\mathbf{q}} \ \bar{\mathbf{p}}^T \mathbf{q}$
                $\text{s.t.} \ \mathbf{A}_k \mathbf{q} - \mathbf{c}_k \geq 0, \ k \in \mathcal{S} \bigcup \{j\},$        (40)
                $\mathbf{0} \leq \mathbf{q} \leq \mathbf{e},$
            and obtain its optimal value $v_j$. If problem (40) is infeasible, $v_j$ is set to be $+\infty$.
          - If $v_j = +\infty$, set $\mathcal{R} = \mathcal{R} / \{j\}$.
        End (For)
Step 3. Termination: If $\mathcal{R} = \emptyset$, then stop; else choose
                $j^* = \arg\min_{j \in \mathcal{R}} \{v_j\},$
        set $\mathcal{S} = \mathcal{S} \bigcup \{j^*\}$ and $\mathcal{R} = \mathcal{R} / \{j^*\}$, and go to Step 2.
```

REFERENCES

[1] I. Mitliagkas, N. D. Sidiropoulos, and A. Swami, "Joint power and admission control for ad-hoc and cognitive underlay networks: Convex approximation and distributed implementation," *IEEE Trans. Wireless Commun.*, vol. 10, no. 12, pp. 4110–4121, Dec. 2011.

[2] H. Mahdavi-Doost, M. Ebrahimi, and A. K. Khandani, "Characterization of SINR region for interfering links with constrained power," *IEEE Trans. Inf. Theory*, vol. 56, no. 6, pp. 2816–2828, Jun. 2010.

[3] G. J. Foschini and Z. Miljanic, "A simple distributed autonomous power control algorithm and its convergence," *IEEE Trans. Veh. Technol.*, vol. 42, no. 4, pp. 641–646, Nov. 1993.

[4] M. Andersin, Z. Rosberg, and J. Zander, "Gradual removals in cellular PCS with constrained power control and noise," *Wireless Netw.*, vol. 2, no. 1, pp. 27–43, Mar. 1996.

[5] N. Bambos, S.-C. Chen, and G. J. Pottie, "Channel access algorithms with active link protection for wireless communication networks with power control," *IEEE Trans. Netw.*, vol. 8, no. 5, pp. 583–597, Oct. 2000.

[6] R. D. Yates, "A framework for uplink power control in cellular radio systems," *IEEE J. Sel. Areas Commun.*, vol. 13, no. 7, pp. 1341–1347, Sept. 1995.

[7] S. A. Grandhi, J. Zander, and R. Yates, “Constrained power control,” *Wireless Personal Commun.*, vol. 1, no. 4, pp. 257–270, Dec. 1994.

[8] M. Andersin, Z. Rosberg, and J. Zander, “Soft and safe admission control in cellular networks,” *IEEE/ACM Trans. Netw.*, vol. 5, no. 2, pp. 255–265, Apr. 1997.

[9] D. I. Evangelinakis, N. D. Sidiropoulos, and A. Swami, “Joint admission and power control using branch & bound and gradual admissions,” *Proc. Int. Workshop Signal Process. Advances Wireless Commun. (SPAWC),* Jun. 2010, pp. 1–5.

[10] Y.-F. Liu, Y.-H. Dai, and Z.-Q. Luo, “Joint power and admission control via linear programming deflation,” accepted for publication in *IEEE Trans. Signal Process.* [Online]. Available: http://lsec.cc.ac.cn/˜dyh/worklist.html.

[11] Y.-F. Liu, “An efficient distributed joint power and admission control algorithm,” in *Proc. 31th Chinese Control Conference,* July, 2012, pp. 5508–5512.

[12] Y.-F. Liu and E. Song, “Distributionally robust joint power and admission control via SOCP deflation,” submitted to *SPAWC 2013,* Darmstadt, Germany, June 16–19, 2013.

[13] E. Matskani, N. D. Sidiropoulos, Z.-Q. Luo, and L. Tassiulas, “Convex approximation techniques for joint multiuser downlink beamforming and admission control,” *IEEE Trans. Wireless Commun.*, vol. 7, no. 7, pp. 2682–2693, Jul. 2008.

[14] M. H. Ahmed, “Call admission control in wireless networks: A comprehensive survey,” *IEEE Commun. Surveys*, vol. 7, no. 1, pp. 50–69, First Quarter, 2005.

[15] A. Behzad, I. Rubin, and P. Chakravarty, “Optimum integrated link scheduling and power control for ad hoc wireless networks,” *Proc. IEEE Int. Conf. Wireless and Mobile Computing, Netw., and Commun.,* vol. 3, Aug. 2005, pp. 275–283.

[16] J.-T. Wang, “Admission control with distributed joint diversity and power control for wireless networks,” *IEEE Trans. Veh. Technol.*, vol. 58, no.1, pp. 409–419, Jan. 2009.

[17] T. Elbatt and A. Ephremides, “Joint scheduling and power control for wireless ad hoc networks,” *IEEE Trans. Wireless Commun.*, vol. 3, no. 1, pp. 74–85, Jan. 2004.

[18] T. Holliday, A. Goldsmith, P. Glynn, and N. Bambos, “Distributed power and admission control for time varying wireless networks,” *Proc. Global Telecommun. Conf.,* Nov. 2004, pp. 768–774.

[19] H.-T. Wai and W.-K. Ma, “A decentralized method for joint control and beamforming in coordinated multicell downlink.” [Online]. Available: http://arxiv.org/abs/1211.4665.

[20] D. J. Love, R. W. Heath, V. K. N. Lau, D. Gesbert, B. D. Rao, and M. Andrews, “An overview of limited feedback in wireless communication systems,” *IEEE J. Sel. Areas Commun.,* vol. 26, no. 8, pp. 1341–1365, Oct. 2008.

[21] G. Calafiore and M. C. Campi, “Unterain convex programs: Randomized solutions and confidence levels,” *Math. Program.* vol. 102, pp. 25–46, 2005.

[22] M. C. Campi and S. Garatti, “The exact feasibility of randomized solutions of uncertain convex programs,” *SIAM Journal on Optimization*, vol. 19, no. 3, pp. 1211–1230, 2008.

[23] A. M.-C. So and Y.-J. Zhang, “Distributionally robust slow adaptive OFDMA with soft QoS via linear programming,” accepted for publication in *IEEE J. Sel. Areas Commun.* [Online]. Available: http://www1.se.cuhk.edu.hk/∼manchoso/.

[24] J. Zander, “Performance of optimum transmitter power control in cellular radio systems,” *IEEE Trans. Veh. Technol.*, vol. 41, no. 1, pp. 57–62, Feb. 1992.

[25] J. R. Birge and F. Louveaux, *Introduction to Stochastic Programming,* 2nd ed. New York, U.S.A.: Springer Verlag, 2011.

[26] R. T. Rockafellar, *Convex Analysis*. Princeton, NJ: Priceton University Press, 1970.

[27] M. Yuan and Y. Lin, “Model selection and estimation in regression with grouped variables,” *Journal of The Royal Statistical Society Series B,* vol. 68, no. 1, pp. 49–67, 2006.

[28] M. Grant, S. Boyd, and Y. Ye, *CVX: matlab software for disciplined convex programming,* 2006. [Online]. Available: http://www.stanford.edu/˜boyd/cvx/.

[29] S. Boyd and A. Mutapcic, "Subgradient methods," Notes for EE364b, Standford University, Winter 2006-07.

[30] Y.-H. Dai and R. Fletcher, "Projected Barzilai-Borwein methods for large-scale box-constrained quadratic programming," *Numer. Math.*, vol. 100, no. 1, pp. 21–47, 2005.

[31] J. Barzilai and J. M. Borwein, "Two-point step size gradient methods," *IMA J. Numer. Anal.*, vol. 8, no. 1, pp. 141-148, 1988.

[32] A. Ben-Tal and A. Nemirovski, *Lectures on Modern Convex Optimization.* Philadelphia, U.S.A.: SIAM-MPS Series on Optimization, SIAM Publications, 2001.

[33] Y. Saad, *Iterative Methods for Sparse Linear Systems,* 2nd ed. New York, U.S.A.: PSW publishing, Jan. 2000.